AP83.00-P-8382F Replace activated charcoal filter


MODEL210 with CODE (580) Automatic air conditioningMODEL211.### #A up to 635991,
211.### #X up to 170336
with CODE (580) Automatic air conditioning
with CODE (581) Comfort automatic air conditioning

Left diagram

- 1 Cover
- 2 Locking slide

Right picture

3 Activated charcoal filter

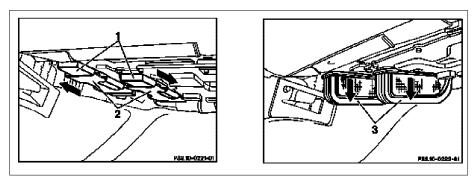

P83.10-0223-04

XX	Remove/Install		
1 ₩ → A R	Remove right cover below instrument panel Remove/install cover below instrument panel (right)	Model 210	AR68.10-P-1520F
₩ AR		Model 211	AR68.10-P-1520T
2	Move locking slide (2) towards arrow and remove cover (1)		
3	Withdraw activated charcoal filter (3) downwards	i The activated charcoal filters (3) may not be cleaned; they must always be replaced.	
4	Install in the reverse order		