
AN82.61-P-7474-04TTS	Retrofit antenna for global positioning system	
	(GPS)	

1 Glue felt tape as shown in the picture (see arrow) onto underside of GPS antenna (25).

1 The underside of the GPS antenna (25) is not equipped with covering foil. The protruding felt tape is additionally used to fasten the GPS antenna (25).

2 Wrap felt tape around the GPS antenna line (11).

i The GPS antenna coupling (12) of the GPS antenna line (11) must not have felt tape wrapped around it.

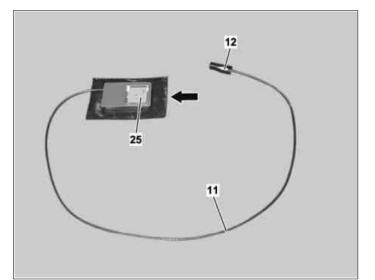

P82.62-2843-11


3 Detach covering foil on upper side of GPS antenna (25) and glue GPS antenna (25) into left upper opening (see picture) of instrument cluster covering and additionally fasten in place using protruding felt tape.

1 The opening of the GPS antenna (25) must face towards the upper side of the instrument panel. The antenna line of the GPS antenna (25) faces towards the passenger side.

- 4 Place the GPS antenna line (11) of the GPS antenna (25) as shown in the picture into the instrument panel and fasten in place with felt tape (see arrow).
- 5 Route GPS antenna line (11) of GPS antenna (25) along on-board wiring harnesses into the driver footwell and make sure it is does not chafe nor make any noise.
- 9 GPS navigation processor coupling
- 13 GPS antenna plug
- 14 GPS antenna extension cable








P82.62-2845-01

- 6 Place GPS antenna extension cable (14) into driver footwell and connect GPS antenna plug (13) with GPS antenna coupling (12) of GPS antenna line (11).
- 7 Route the GPS antenna extension line (14) into the left cable duct and up to the area of the left rear seat and fasten in place to ensure it does not chafe nor make any noise.



8 Route GPS antenna extension line (14) as shown in the picture along vehicle's own wiring harnesses into the luggage compartment (see arrow) and fasten in place to ensure it does not chafe nor make any noise.

Shown on model 211.0

9 Route GPS antenna extension line (14) as shown in the picture into luggage compartment and strap down overlength of GPS antenna extension line (14) to vehicle's own wiring harnesses (see arrows).

i The GPS navigation processor coupling (9) of the GPS antenna extension line (14) is later connected to the navigation processor.

Shown on model 211.0



P82.62-2847-02



P82.62-2848-01